

TUCSON INTERNATIONAL AIRPORT
Family Restrooms/Custodial Closets
Tucson Airport Authority
TAA Project #10217978
ARCHITECT'S JOB NO. 124
February 15, 2019

ADDENDUM ONE

In accordance with the Bid Documents, Bidders on the above-referenced project are hereby notified that the following Addendum, dated February, 2019 shall be made a part of the Bid Documents. Bidder shall acknowledge receipt of this Addendum on the Bid Form. Bidder shall return this Addendum along with any copies of drawings and specifications issued with the Addendum complete and in good condition at the time of bid submission.

- Item #1:** Working Drawings; Sheet A-1.3: Demolition Plan; Key Note "22-2" should read "22-3".
- Item #2:** Working Drawings; Sheets A-2.3 & A-4 Rm. #414E: Provide solid backing for future grab bars "A", "B", & "C".
- Item #3:** Reference Working Drawings; Interior Elevations "3", "9" & "16" Sht. A-4 and T.S. Sec. 102800.
Rooms #TB2-136, TA2-414E & A2-203B shall receive Adult Changing Stations in lieu of Diaper Stations specified. Support framing shall be in accordance with Interior Elevation 5 Sht. A-4. At all Adult Changing Station locations all 18 Ga. steel studs shall be fitted with "trimmed" 2x wood studs in accordance with the manufactures requirements.
- Item #4:** T.S. Sec. 096623 – Resinous Terrazzo Flooring; Delete in its entirety.
Reference Working Drawings Rooms #TB1-205, TA1-322, TB2-154, TB2-154A, A2-203, A2-203A & A2-203B: Existing terrazzo flooring shall remain in place. Where partitions are removed -remove existing terrazzo wall base and cove to the zinc control strip. Infill all areas of partition removal and bare floor with "Pre-Cast Thin Set Terrazzo Tile*" complete with matching wall base and zinc control strips. Prepare existing slab per the manufactures requirements and Install "Pre-Cast Thin Set Terrazzo Tile" in accordance with T.S. Sec. 093013 and manufacturers requirements. Provide "Terrazzo" in sections as large as possible to minimize joints, using manufacturers standard sizes; 4' x 8', 4' x 4', 2' x 2'.
Color for Rooms # TB1-205 & TA1-322: "Thunder Gray" #519. All other Rooms Color: "Bleached Moss" #525.

Rm. #TB2-277E: Remove existing ceramic tile and prepare floor for new "Pre-Cast Thin Set Terrazzo Tile".


*"Pre-Cast Thin Set Terrazzo Tile": Terrazzo, Surface Elements, Inc. 1132 Bradshaw Drive, Florence, Alabama 35630 (256.740.3977) or approved equal.



- Item #5:** Reference Working Drawings Rooms #TB1-214, TB2-130 & TA2-410. Existing concrete floor surfaces shall receive "LVT" (Luxury Vinyl Tile) as manufactured by Armstrong World Industries "Vivero Best" 6" x 48" x 0.160 in thick. Color: Cinder Forest, Cosmic Gray, UI022.. Existing concrete floor surface shall be floated to level with "Ardex" or equal.
- Item #6:** Reference Working Drawings Rooms #TB2-136, TB2-176, TA2-414A, B, C, D & E (all walls interior and exterior). Where new ceramic tile abuts existing terrazzo floor finish provide Schluter DILEX-AHKA-100AE "Set On" Cove complete with inside and outside corners.

End of Addendum One

Respectfully Submitted;

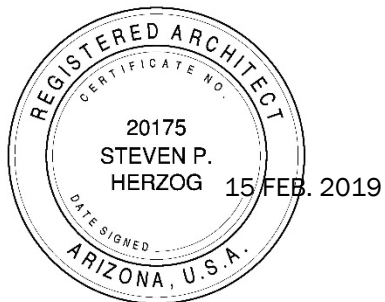

Expires: 03:31:2021