

**TUCSON INTERNATIONAL AIRPORT**  
**Family Restrooms/Custodial Closets**  
Tucson Airport Authority  
TAA Project #10217978  
ARCHITECT'S JOB NO. 124  
March 25, 2019

---

**ADDENDUM THREE**

---


In accordance with the Bid Documents, Bidders on the above-referenced project are hereby notified that the following Addendum, dated March 25, 2019 shall be made a part of the Bid Documents. Bidder shall acknowledge receipt of this Addendum on the Bid Form. Bidder shall return this Addendum along with any copies of drawings and specifications issued with the Addendum complete and in good condition at the time of bid submission.

- Item #1:** X-ray of concrete retaining wall at baggage chase is not required prior to coring provided the core is located within 12 inches of the bottom of the floor slab. If field conditions dictate the core must be lower, the retaining wall shall be x-rayed to determine the location of reinforcing and the core location approved by the structural engineer.
- Item #2:** At all abandoned plumbing penetrations in floor slab provide L4x4x1/4 steel angle below steel deck centered on hole(s) to be filled in. Angle may be oriented parallel or perpendicular to deck ribs as required. Secure angle to existing concrete with 1/4" dia. Simpson Titen screws with 1 1/2" embedment in concrete (screws at 12" o.c. max, 2 screws minimum per angle.
- Item #3** Reference Working drawings sheets A-1.1 and P-1.1; Room #TB1-205. The sewer connection shown is below slab-on-grade. Contractor shall provide saw-cut, backfill and floor replacement including new ceramic floor tile (which shall match existing as well as possible). The 3" drop shown will require removal and replacement of a portion of the existing drywall and wall tile. Replacement wall tile shall match existing as well as possible. As-Built drawings will be made available to the contractor.

---

**End of Addendum Three**

Respectfully Submitted;

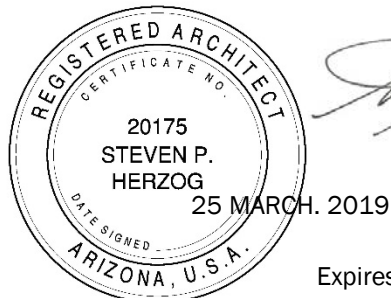

Expires: 03:31:2021